



15 CHANNEL REMOTE LUNA BELT INSTRUCTIONS

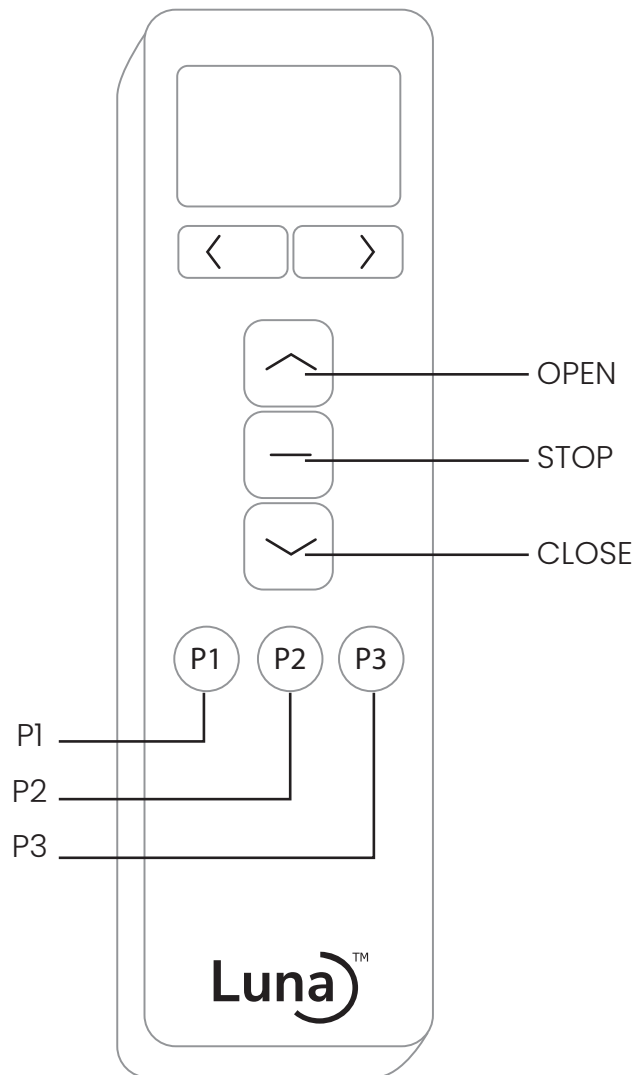

I/O summary

1. Magnetic charging connector
2. Status LED
3. PROG button
4. SET button
5. SCM port

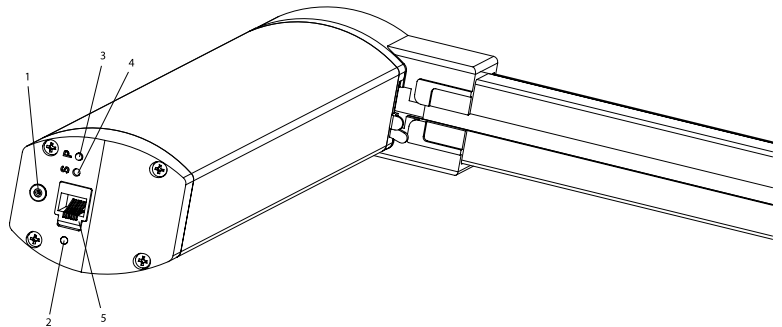



Blink green twice	Command received/ Wake from deep sleep
Solid green	Pairing mode
Constant green blink	Limit setting mode
Blink amber twice	Enter deep sleep mode
Constant red blink	Low battery
Blink red twice	Error / Flat battery

15 CHANNEL REMOTE LUNA BELT INSTRUCTIONS

Using the Onboard Controls



Pairing a channel to remote

1. Press and hold the **PROG** button until the status **LED** turns solid green.
2. Select the desired channel on the remote handset.
3. Press and hold the  and  buttons on the remote.
4. After 3-5 seconds, the status **LED** will also flash green, then turn off.
5. Pairing is now complete.


Limit setting

1. Ensure the motor is stopped at least 10 cm away from the fully closed position.
2. Press and hold the **SET** button until the green **LED** starts to blink constantly.
3. Manually pull the curtain towards the fully closed direction.
4. Motor will engage and move the curtain until it has reached the fully close position, then reverse and move the curtain until it has reached the fully open position. Upon detecting both positions, the limits will be automatically saved.

How to delete all channels:

1. Hold **P1 + P3**
2. Hold  + 

How to delete current channels:

1. Hold **P1 + P3**
2. Hold  + 